

# VD 12 M CR



## Luminaire: Followspot, discharge, 1200W zoom 07°-18°, cold restrike, G22

### Type

Conventional line

### Family

Followspot

### Source

Discharge

### Power

1200W

### Connectors

Cable without plug

### Lamp holder

G22

### Voltage

220-240V, 50-60Hz

### Product sizes

17.3Kg

### Pack sizes

335mm x 1205mm x 355mm

23.2Kg

0.143m<sup>3</sup>

### DWG

Available on website


### User manual

Available on website


### Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Independent and removable shutter blades for beam shaping
- Filter frame lockable top cover
- Gobo-holder slot
- Soft and smooth lens focusing adjustment
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Auto power-off by safety microswitch for maintenance and access into the lantern
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector

### Sizes (in mm)

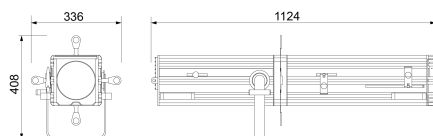

### Light output diagram



### Accessories

BS	Acc: Low stand, DIN, lazy leg
CGP2	Acc: 3-section Wind-Up Stand, lazy leg
CMA 12 E	Acc: Manual 6-colour colour changer
DIM 12 PERS/MAN	Acc: Manual mechanical dimmer
DIN P 10	Acc: TV spigot / M10 adapter with plate
PGB R 130	Acc: B size adjustable gobo-holder
RF	Acc: Wheel set with brake
SUP BA 12/25	Acc: Ballast-holder for stand

### LED equivalents

VD LED 250 WW DMX	Luminaire: Followspot, LED, 250W, WW
VD LED 250 RGBW DMX	Luminaire: Followspot, LED, 250W, RGBW
VD LED 250 CW DMX	Luminaire: Followspot, LED, 250W, CW