

COM 05 F

Luminaire: Fresnel, halogen, 650W
zoom 07°-62°, GY9.5



Type

Conventional line

Family

Fresnel

Source

Halogen

Power

300W 500W 650W

Connectors

Cable without plug

Lamp holder

GY9.5

Voltage

220-240V, 50-60Hz

Product sizes

3Kg

Pack sizes

205mm x 245mm x 334mm

3.4Kg

0.017m³

IES/LDT

Available on website

DWG

Available on website


User manual

Available on website


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- 99,99% polished and treated aluminum reflector
- PO version on request, with 3-way pole operation for tilt, pan and focus
- ARC version on request, with 3-way DMX control of tilt, pan and focus

Sizes (in mm)

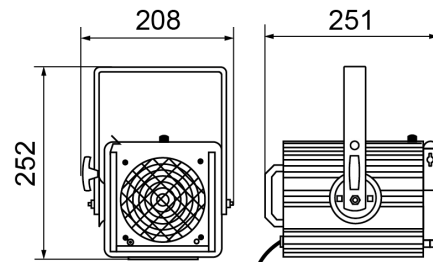

Light output diagram



Accessories

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 75kg max

PL 4 U05

Acc: 4-door barndoors

PO/2 SP05

Yoke: Pole Operated for Pan-Tilt

PO/3 SP05

Yoke: Pole Operated for Pan-Tilt-Focus

RS05

Acc: Safety net

TC S05

Acc: Colour frame

LED equivalents

FN LED 150 TW DMX

Luminaire: Fresnel, LED, 150W, TW

FN LED 150 RGBW DMX

Luminaire: Fresnel, LED, 150W, RGBW

FN LED C100 WW DMX

Luminaire: Fresnel, LED, 100W, WW

FN LED C100 NW DMX

Luminaire: Fresnel, LED, 100W, NW

FN LED C100 CW DMX

Luminaire: Fresnel, LED, 100W, CW