

# COM 05 PC

Luminaire: PC, halogen, 650W  
zoom 04°-56°, GY9.5



Type  
Conventional line

Family  
PC

Source  
Halogen

Power  
300W 500W 650W

Connectors  
Cable without plug

Lamp holder  
GY9.5

Voltage  
220-240V, 50-60Hz

Product sizes  
3.7Kg

Pack sizes  
190mm x 235mm x 386mm  
4Kg  
0.017m<sup>3</sup>

IES/LDT  
Available on website


DWG  
Available on website

User manual  
Available on website


## Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- 99,99% polished and treated aluminum reflector
- PO version on request, with 3-way pole operation for tilt, pan and focus
- ARC version on request, with 3-way DMX control of tilt, pan and focus

## Sizes (in mm)

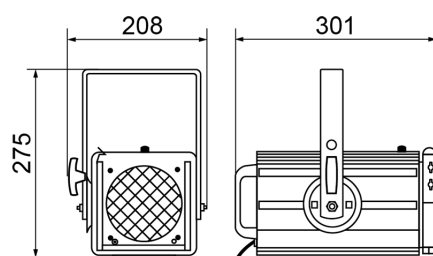

## Light output diagram



## Accessories

FUNE	Acc: Safety net with spring hook
GAC	Acc: Hook clamp for 40/50mm tube
HC/075	Acc: Half swivel coupler 75kg max
PL 4 U05	Acc: 4-door bamdoors
PO/2 SP05	Yoke: Pole Operated for Pan-Tilt
PO/3 SP05	Yoke: Pole Operated for Pan-Tilt-Focus
R S05	Acc: Safety net
TC S05	Acc: Colour frame

## LED equivalents

PC LED C100 WW DMX	Luminaire: PC, LED, 100W, WW
PC LED C100 CW DMX	Luminaire: PC, LED, 100W, CW
PC LED C100 NW DMX	Luminaire: PC, LED, 100W, NW