

COM 05 ZW

Luminaire: Profile, halogen, 650W zoom 23°-40°, GY9.5



Type

Conventional line

Family

Profile

Source

Halogen

Power

300W 500W 650W

Connectors

Cable without plug

Lamp holder

GY9.5

Voltage

220-240V, 50-60Hz

Product sizes

4.5Kg

Pack sizes

275mm x 275mm x 560mm

5.5Kg

0.042m³

IES/LDT

Available on website

DWG

Available on website


User manual

Available on website


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- 99,99% polished and treated aluminum reflector
- PO version on request, with 2-way pole operation for tilt and pan
- ARC version on request, with 3-way DMX control of tilt, pan and iris diaphragm

Sizes (in mm)

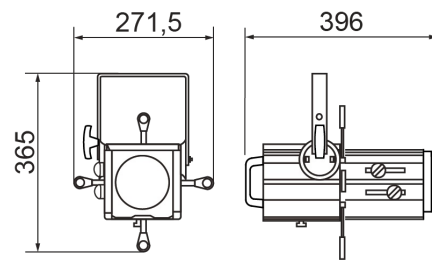

Light output diagram

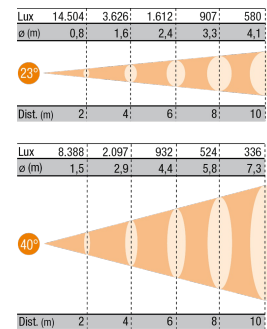

Accessories

DIA 05

Acc: Iris diaphragm

DIA 05 BO

Acc: Iris diaphragm with blackout

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 75kg max

PGB R 100

Acc: B size adjustable gobo-holder

PGMR 100

Acc: M size adjustable gobo-holder

PO/2 SP05

Yoke: Pole Operated for Pan-Tilt

TC S05

Acc: Colour frame

LED equivalents

PR LED 100 ZW CW DMX

Luminaire: Profile, LED, 100W, CW

PR LED 100 ZW NW DMX

Luminaire: Profile, LED, 100W, NW

PR LED 100 ZW WW DMX

Luminaire: Profile, LED, 100W, WW

PR LED 150 Z WRGBWDMX

Luminaire: Profile, LED, 150W, RGBW

PR LED 150 ZW TW DMX

Luminaire: Profile, LED, 150W, TW