



# DRIVENET 832 POWER

## 32-CHANNEL LED POWER SUPPLY / CONTROLLER





DRIVENET 832 POWER is a 32-channel rack-mountable, 180-240 Vac 50-60 Hz, power supply / controller unit in DTS range output voltage of 48Vdc and 1600mA output current. It can control the power range of DTS LED projectors.

DRIVENET 832 POWER introduces a series of features:

- 32 output channels individually programmable (4 groups, 4 channels each).
- Unit controlled via RDM/DMX 512 protocol or Art-Net protocol (with optional interface)
- Current individually selectable for each output channel.
- Touch-screen color display for managing any function.
- Updatable operating software.



### DRIVENET 3U RACK

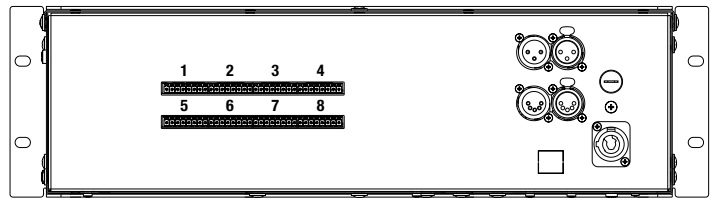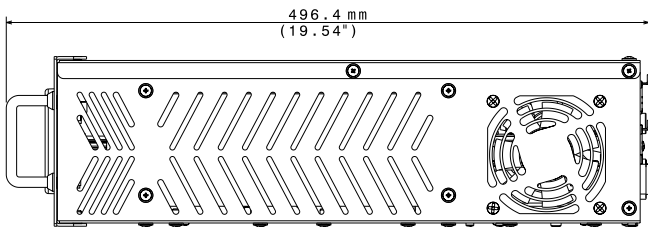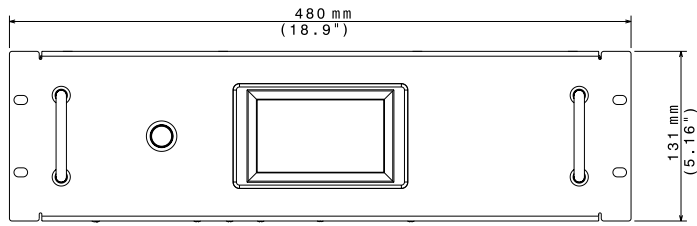

03.LA.184

<b>Input voltage/frequency range</b>	<b>180-240Vac 50-60Hz *</b>
<b>Power Factor</b>	PF >0.95
<b>Output channels</b>	32 (4 channels x 8 groups)
<b>Output voltage</b>	48Vdc
<b>Output current</b>	1600mA Max (per channel)
<b>Max power</b>	2400W
<b>Max projectors distance</b>	50 m
<b>Output connections</b>	Screw terminal connectors
<b>Mains connections</b>	PowerCON male panel connector
<b>DMX connections</b>	XLR 5-pole and XLR 3-pole panel connectors
<b>Display</b>	Touch-screen color display
<b>DMX</b>	•
<b>RDM</b>	•
<b>Art-Net</b>	• (optional)
<b>Operating temperature</b>	-10° / 40° C
<b>Rack units</b>	3U
<b>Protection rating</b>	IP20
<b>Weight</b>	13.8 Kg
<b>Carton box weight</b>	15.8 Kg (34.8 lbs)
<b>Carton box dimensions (LxHxD)</b>	570 x 530 x 220 mm (22.4" x 20.9" x 8.7")

## CONNECTIONS CHART

<b>FOS 100 POWER FC</b>	Max 8 (1 item per output)
<b>BRICK ARC</b>	Max 8 (1 item per output)