

COOLIE 186

BW 186



Light Source
18 x 6W RGBW LED

Beam Angle
18°, 22°, 24°, 43°, 58°

Field Angle
37°, 45°, 53°, 77°, 95°

Protection Rating
IP66



Main Features

Light Source: 18 x 6W RGBW LED

Beam Angle: 18°, 22°, 24°, 43°, 58°

Field Angle: 37°, 45°, 53°, 77°, 95°

Total Lumen Output of Fixture: 3,276 lumens (18°)

Order Lens Options: D15, D25, D30, D45, D60

Variable CTO: 2,500K-8,000k

Intelligent light detection can automatically activate the lighting mode and adjust the duration of the light according to the environment

Compact size, light weight, high light efficiency, low energy consumption


Outstanding strobe effect with variable speed

Smooth dimming 0-100%

Protection Rating: IP66, can be used outdoors all year round
IP66 rated

Optional half or top hat

Technical Specifications

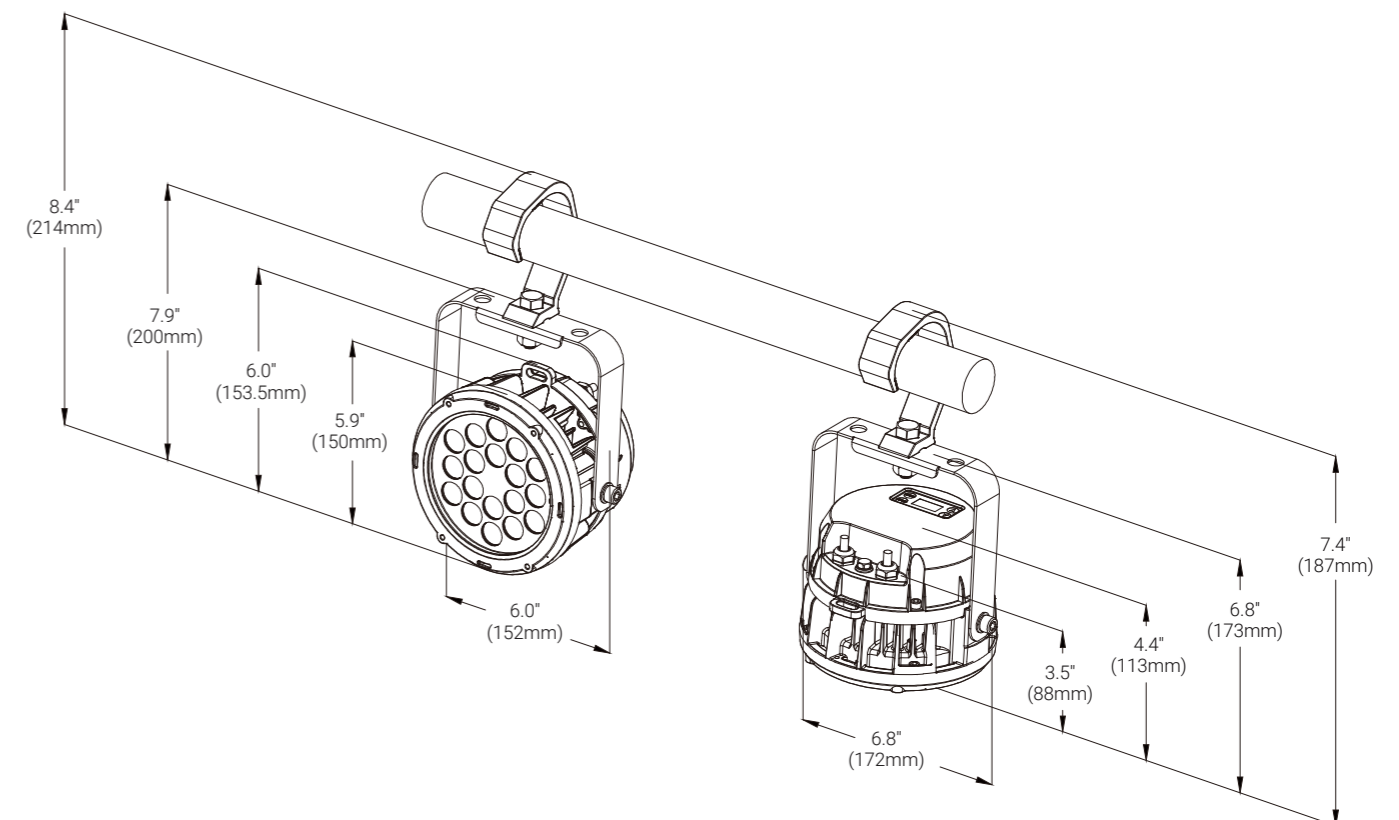

Light Source

- Light Source: 18 x 6W RGBW LED
- Total Lumen Output of Fixture: 3,276 lumens (18°)
- Life Expectancy: 20,000 hours* manufacturer specification

Optical System

- High-efficiency optical system
- Beam Angle: 18°, 22°, 24°, 43°, 58°
- Field Angle: 37°, 45°, 53°, 77°, 95°
- Order Lens Options: D15, D25, D30, D45, D60

Colors

- Linear CTO Color Correction: 2,500K-8,000k



Other Effects

- Outstanding strobe effect with variable speed
- Smooth dimming 0 -100%

Control

- 4 touch button control panel
- Display: OLED display
- Protocols: DMX512, RDM, Primary/Show Mode/Secondary
- DMX Protocol Modes: 4
- Control Channels: 4/5/8/10
- Firmware Upgrade: Upgrade via DMX link

Electrical and Connectors

- Input Voltage Range: 100-240Vac; 50/60 Hz
- Power Consumption: 55W
- Power In/Out: Bare wire output
- Data In/Out: Bare wire output

Physical Information

- Fixture Dimensions: 200 x 172 x 113 mm (7.9" x 6.8" x 4.4")
- Weight: 2.2 kg (4.9 lbs)

Packing Information

- Carton Dimensions: 260 x 230 x 185 mm (10.2" x 9.0" x 7.2")
- Weight: 2.3 kg (5.1 lbs) (one-pack loader carton)

Work Environment

- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: -10°C
- Maximum Surface Temperature: 75°C
- Neutral Salt Spray: 720 hours
- Protection Rating: IP66

Installation

- Horizontal or vertical mounting
- Universal working position
- The feet support with 3 locking points
- Safety cable attachment point

Optional Half or Top Hat


1. Top Hat



2. Half Hat



Photometric (Images)

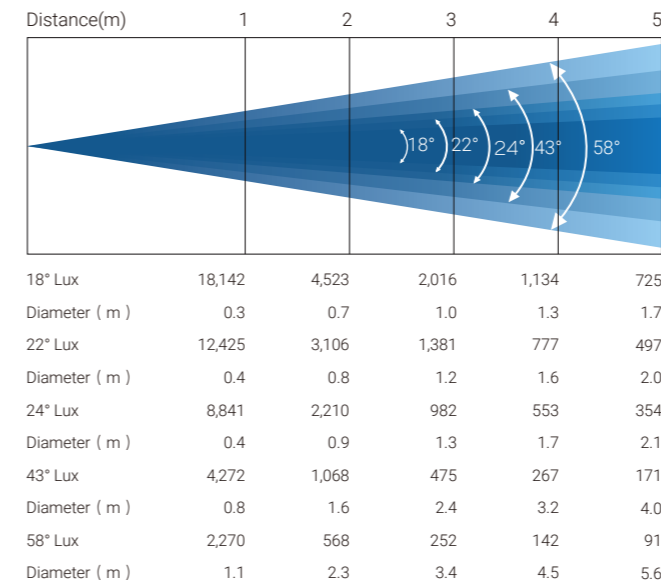

Specifications subject to change without notice.