

FLANDINA 12 IP

BAR 12 IP



Light Source

12 x 15W RGBW LED

Beam Angle

6°, 32°

Field Angle


11°, 60°

Protection Rating

IP66

Acme

FLANDINA 12 IP

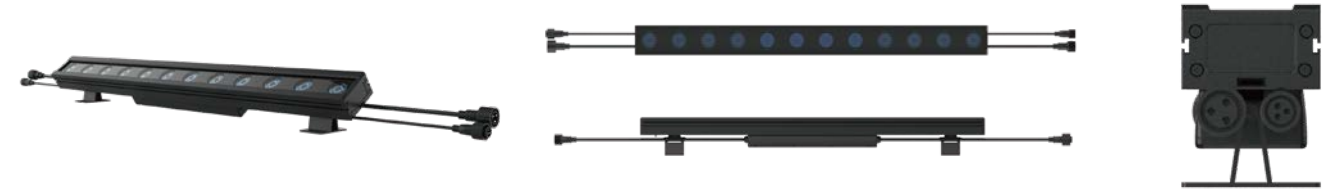

Main Features

12 pcs LED pixel control

Light Source: 12 x 15W RGBW LED

Beam Angle: 6°, 32°

Field Angle: 11°, 60°

Asymmetric Angle: 10 x 45°


Outstanding strobe effect with variable speed

Smooth dimming 0-100%

Dual mounting bracket design and the adjustable angle reaches 180° in both direction

Flicker free management

Technical Specifications

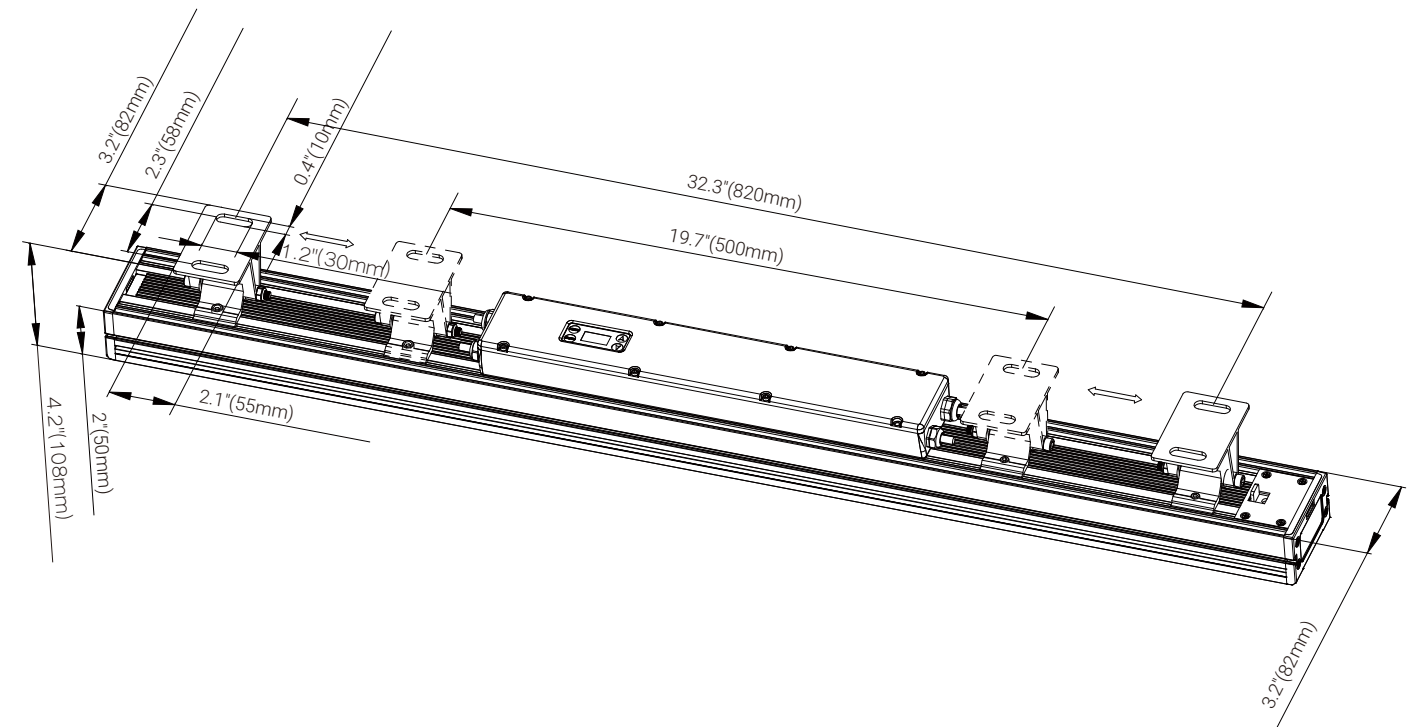

Light Source

- Light Source: 12 x 15W RGBW LED
- Life Expectancy: 20,000 hours * manufacturer specification

Optical System

- Beam angle: 6°, 32°
- Field angle: 11°, 60°
- Asymmetric angle: 10 x 45°

Other Effects

- 12 pcs LED pixel control
- Outstanding strobe effect with variable speed
- Smooth dimming 0-100%
- Flicker free management

Control

- 4 touch button control panel
- Display: OLED display
- Control Mode: DMX512, RDM
- DMX Protocol modes: 7
- Control channels: 4/5/6/12/48/50
- Upgrade the firmware via DMX link

Electrical and Connectors

- Power supply with electronic auto-ranging
- Input voltage range: 100-240Vac; 50/60Hz
- Power consumption: 135W
- Power In/Out:
 - Waterproof Power connector in/out (TRUE1 type)
- Data In/Out: 3-pin or 5-pin waterproof XLR

Physical Information

- Fixture Dimensions:
 - 1,000 x 82 x 108 mm (39.3" x 3.3" x 4.2")
 - Weight: 7.2 kg (15.9 lbs)

Packing Information

- Carton Dimensions:
 - 1,070 x 150 x 190 mm (42.1" x 5.9" x 7.5")
 - Weight: 31.0 kg (68.3 lbs) (one-pack loader carton)

Work Environment


- Maximum Ambient Temperature: 40°C
- Minimum Operating Temperature: -10°C
- Maximum Surface Temperature: 65°C
- Protection Rating: IP66

Installation

- Horizontal or vertical mounting
- Universal working position
- Dual mounting bracket design and the adjustable angle reaches 180° in both direction

Photometric (Images)

Beam Angle:

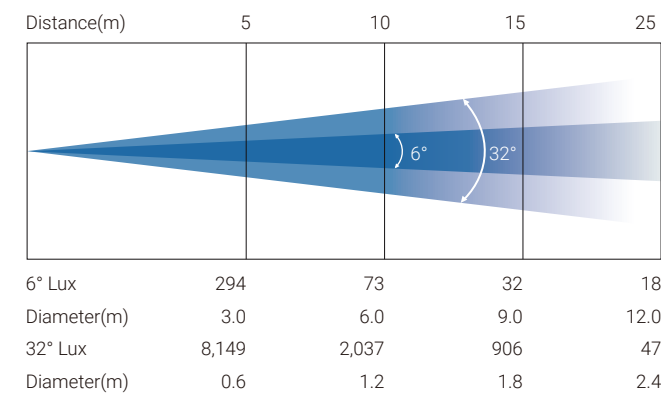

Specifications subject to change without notice.